

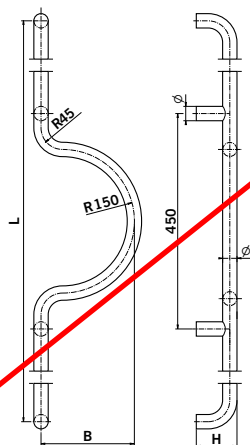


TG 9318

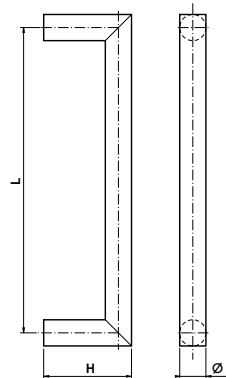

Ø mm	30
B mm	195
H mm	85
L mm	700
bis	2000

TG 9335

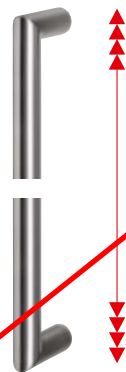



Ø mm	25	32	40
H mm	75	85	100
L mm	≥ 210	≥ 200	≥ 200
ab L mm*	1600	1800	2600

Standardlänge 350 mm
* = zusätzlicher Befestigungspunkt

■ Variable Längen verfügbar



TG 9355

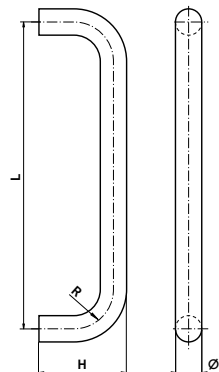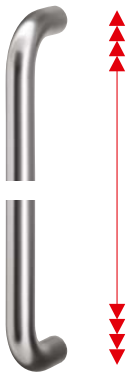

L = 450mm

Ø mm	20	25	32	40
R mm	30	40	45	60
H mm	65	75	85	100
L mm ≥	≥ 150	≥ 210	≥ 210	≥ 250
ab L mm *	*	1600	1800	2000

* = zusätzlicher Befestigungspunkt

■ Variable Längen verfügbar

